

ELPA 1


Item no.: 0010002

theben

Time and light control Staircase time switches

Description

- Zero-cross switching for relay-saving switching and high lamp loads
- Multi-functional device with 10 available functions, set at the front of the device
- Additional multi-voltage input electrically isolated for AC/DC 8...240 V, e.g. für intercoms
- Switch-off pre-warning (two double flashes) in accordance with DIN 18015-2 to avoid sudden darkness
- Extended function activated via long button press
- Immediate secondary switching (stair light switch) or prematurely switched off (pulse switch with switch-off delay)
- Permanent switch
- Electronic pulse light
- Staircase time switch, electrical
- Terminal layout same as ELPA 8
- Extremely accurate
- Push button input with electronic overload protection
- Automatic 3 or 4 conductor detection (4 conductor with connection for floor lighting, 3 conductor no longer permitted for new systems)

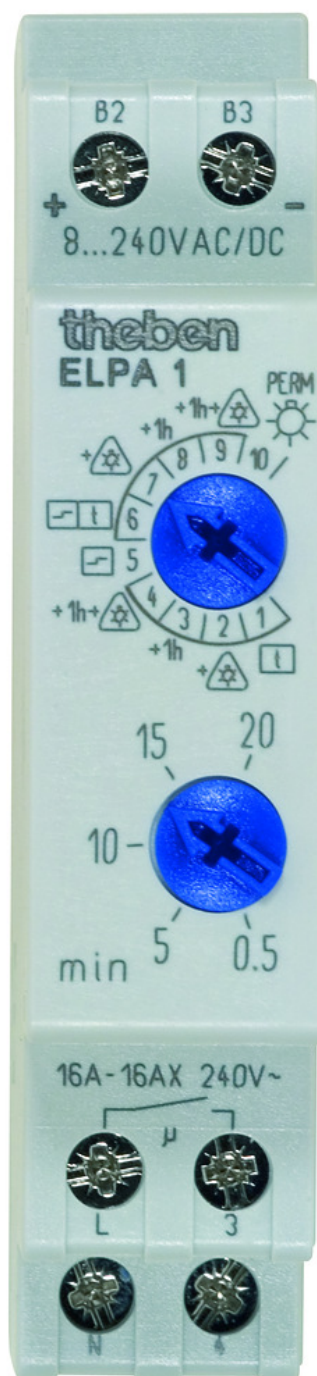

Subject to technical changes and misprints

additional information at: www.theben.de/product/0010002

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

ELPA 1

Item no.: 0010002




Technical data

ELPA 1	
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Width	1 modules
Installation type	DIN rail
Stand-by consumption	~0.3 W
Capacity loss max.	1 W
Glow lamp load	100 mA
Setting range time	0.5 - 20 min
Type of connection	3-/4-conductors
3/4-way conductors	Automatic
Secondary switching	At once
Duty cycle in per cent	100
Type of contact	NO contact
Opening width	< 3 mm (μ)
Switching output	Not potential-free (230 V)
Incandescent/halogen lamp load	2600 W
Fluorescent lamp load (conventional) lead-lag circuit	2600 VA
Fluorescent lamp load (conventional) parallel-corrected	1300 VA 130 μ F
LED lamp < 2 W	55 W
LED lamp 2-8 W	600 W

ELPA 1	
LED lamp > 8 W	600 W
Fluorescent lamp load (electronic ballast)	1100 W
Fluorescent lamp load (conventional) series-corrected	2600 VA
Fluorescent lamp load (conventional) not corrected	2600 VA
Switching capacity	16 AX at 230 V AC, $\cos \varphi = 0.3$, 16 A at 230 V AC, $\cos \varphi = 1$
Inrush current	max. 800 A / 200 μ s
Switch for permanent light	✓
Switch-off pre-warning	✓
Multi-voltage input	✓
Zero-cross switching	✓
Test approval	VDE
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Ambient temperature	-25°C ... 50°C
Protection class	II
Type of protection	IP 20

Connection example

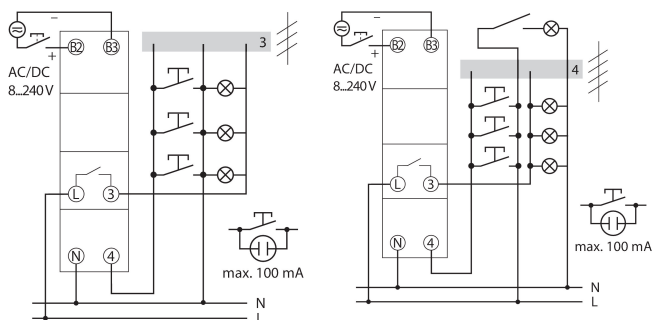


Subject to technical changes and misprints

additional information at: www.theben.de/product/0010002

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

Scale drawings

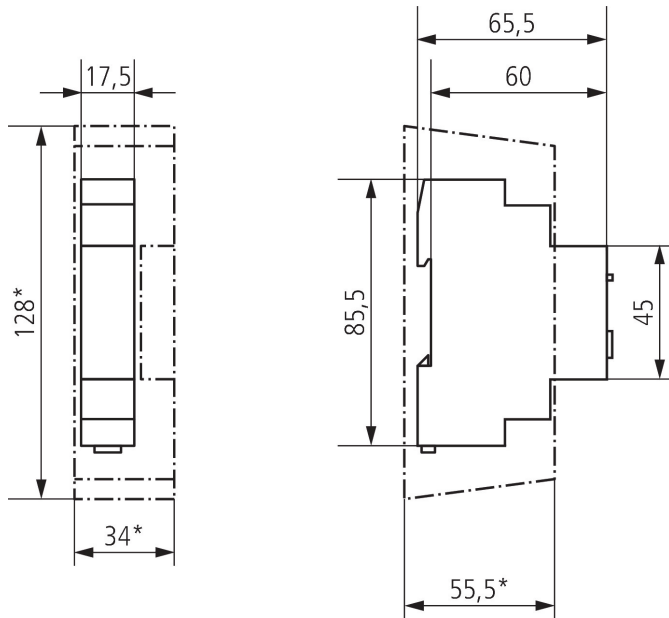

Accessories

Wall mounting kit 17,5 mm
Item no.: 9070065



Front panel kit
Item no.: 9070001

